UPLIFT FROM TRUSS MFRS DATA	OPTIONAL CONNECTORS	ALLOWABLE UPLIFT LOADS
	Simpson Strong-Tie	
180-230	H2	230
180-235	H4	235
180-265	H5	265
180-320	H3	320
180-365	H2.5	365
180-400	H1	400
180-520	H2.5A	520
180-530	H8	530
180-620	LTS12	620
180-730	MTS12	730
180-780	H10	780
180-785	H6	785
180-800	H7	800
180-1120	H15	1120
180-1265	H16	1265
180-1560	2-H10	1560
180-1785	HGT2	1785
180-2490	2-HTS20	2490

SUPPORT REPORT — JOB DESCRIPTION: 50129P1
WIND CODE: ASCE 7-98 — WIND MPH: 100 — BLDG TYPE: VARIES

SUPPORT REPORT — JOB DESCRIPTION: 50129P1
WIND CODE: ASCE 7-98 — WIND MPH: 100 — BLDG TYPE: CLOSED

TRUSS DESC	TRUSS SPAN-ft	SUPPORT SIZE-in.	SUPPORT TYPE	BEARING XLOC-ft.	BEARING YLOC-ft.	REACT. MAX.-#	REACT. MAX.-#	MAX WIND UPLFT.-#
A1	34.000	46.000	WALL	-3.542	8.094	3560		-312
A1	34.000	3.500	WALL	7.875	8.094	2061		-412
A1	34.000	5.500	WALL	26.542	8.094	2328		-467
A2	32.000	5.000	WALL	0.542	8.094	1116		-301
A2	32.000	3.500	WALL	11.875	8.094	1721		-350
A2	32.000	5.500	WALL	32.542	8.094	2808		-577
A2	32.000	3.500	WALL	42.708	8.094	281		-180
A3	32.000	5.000	WALL	0.542	8.094	1064		-283
A3	32.000	3.500	WALL	11.500	8.094	1753		-373
A3	32.000	5.500	WALL	32.542	8.094	2893		-602
A3	32.000	3.500	WALL	42.708	8.094	221	-35	-180
A4	11.500	5.000	WALL	0.000	8.094	483		-180
A4	11.500	3.000	Special	11.250	8.094	483		-200
A7	34.000	46.000	WALL	-3.542	8.094	3431		-685
A7	34.000	5.500	WALL	22.500	8.094	2608		-401
A7	34.000	3.000	HANGER	33.750	8.094	2141		-428
B1	34.000	5.500	WALL	0.000	8.094	3023		-661
B1	34.000	3.500	WALL	33.708	8.094	3023		-661
B2	34.000	5.500	WALL	0.000	8.094	2227		-424
B2	34.000	5.500	WALL	33.542	8.094	2227		-424
B3	34.000	3.000	HANGER	0.000	8.094	1639		-297
B3	34.000	5.500	WALL	11.542	8.094	924		-196
B3	34.000	5.500	WALL	33.542	8.094	1971		-370
B4	34.000	5.500	WALL	0.000	8.094	1734		-336
B4	34.000	5.500	WALL	11.542	8.094	922		-194
B4	34.000	5.500	WALL	33.542	8.094	1971		-370
B5	34.000	5.500	WALL	0.000	8.094	1734		-336
B5	34.000	3.500	WALL	22.292	8.094	2608		-401
B5	34.000	3.500	WALL	33.708	8.094	1971		-370
C1	16.000	5.500	WALL	0.000	8.094	977		-306
C1	16.000	5.500	WALL	15.542	8.094	977		-306
C2	16.000	5.500	WALL	0.000	8.094	754		-240
C2	16.000	5.500	WALL	15.542	8.094	754		-240
C3	16.000	5.500	WALL	0.000	8.094	759		-244
C3	16.000	5.500	WALL	15.542	8.094	759		-244
C4	16.000	5.500	WALL	0.000	8.094	1495		-1069
C4	16.000	5.500	WALL	15.542	8.094	1495		-1069
D1	10.000	120.000	WALL	0.000	8.094	922		-401

SUPPORT REPORT — JOB DESCRIPTION: 50129P1
WIND CODE: ASCE 7-98 — WIND MPH: 100 — BLDG TYPE: VARIES

SUPPORT REPORT — JOB DESCRIPTION: 50129P1
WIND CODE: ASCE 7-98 — WIND MPH: 100 — BLDG TYPE: CLOSED

TRUSS DESC	TRUSS SPAN-ft	SUPPORT SIZE-in.	SUPPORT TYPE	BEARING XLOC-ft.	BEARING YLOC-ft.	REACT. MAX.-#	REACT. MAX.-#	MAX WIND UPLFT.-#
D2	10.458	3.500	WALL	0.000	8.094	561		-257
D2	10.458	5.500	WALL	10.000	8.094	1273		-582
D3	16.750	3.500	WALL	0.000	8.094	494		-180
D3	16.750	5.500	WALL	10.000	8.094	753		-236
D3	16.750	3.000	Special	16.500	8.094	242		-196
D4	11.750	3.000	Special	0.000	8.094	618		-180
D4	11.750	3.000	Special	11.500	8.094	801		-311
E1	6.333	76.000	WALL	0.000	9.094	651		-290
E2	6.000	3.500	WALL	0.000	9.094	405		-180
E2	6.000	1.500	NAILED	5.875	9.094	214		-180
G1	11.625	3.500	WALL	0.000	8.094	2084		-673
G1	11.625	3.500	WALL	11.708	8.094	2849		-920
G2	11.625	3.500	WALL	0.000	8.094	2351		-759
G2	11.625	3.500	WALL	11.333	8.094	3414		-1102
G3	11.625	3.500	WALL	0.000	8.094	2020		-652
G3	11.625	3.500	WALL	11.333	8.094	2797		-903
G4	4.604	16.500	WALL	0.000	8.094	1541		-498
G4	4.604	3.000	Special	4.354	8.094	1068		-345
G5	8.854	42.250	WALL	0.000	8.094	3888		-180
G5	8.854	3.000	Special	8.604	8.094	3158		-180
H1	4.250	3.000	WALL	0.000	18.094	242		-180
H1	4.250	3.000	WALL	4.000	18.094	242		-180
H2	5.667	3.000	WALL	0.000	18.094	301		-180
H2	5.667	3.000	WALL	5.417	18.094	301		-180
H3	4.250	3.000	WALL	0.000	18.094	178		-180
H3	4.250	3.000	WALL	4.000	18.094	178		-180
H4	5.667	3.000	WALL	0.000	18.094	238		-180
H4	5.667	3.000	WALL	5.417	18.094	238		-180
AA1	20.499	3.500	WALL	-1.000	14.594	892		-253
AA1	20.499	3.000	WALL	19.932	18.094	914		-284
AA2	20.499	3.500	WALL	-1.000	14.594	903		-256
AA2	20.499	3.000	WALL	20.208	18.094	903		-281
AA3	15.501	3.000	WALL	0.751	18.094	607		-185
AA3	15.501	3.000	WALL	15.210	18.094	628		-167

SUPPORT REPORT — JOB DESCRIPTION: 50129P1
WIND CODE: ASCE 7-98 — WIND MPH: 100 — BLDG TYPE: VARIES

SUPPORT REPORT — JOB DESCRIPTION: 50129P1
WIND CODE: ASCE 7-98 — WIND MPH: 100 — BLDG TYPE: CLOSED

TRUSS DESC	TRUSS SPAN-ft	SUPPORT SIZE-in.	SUPPORT TYPE	BEARING XLOC-ft.	BEARING YLOC-ft.	REACT. MAX.-#	REACT. MAX.-#	MAX WIND UPLFT.-#
EJ5	5.000	3.500	WALL	0.000	8.094	322		-180
EJ5	5.000	1.500	NAILED	5.000	8.094	70		-180
EJ5	5.000	1.500	NAILED	5.000	11.448	109		-180
CJ3	3.000	3.500	WALL	0.000	8.094	252		-180
CJ3	3.000	1.500	NAILED	3.000	8.094	25		-180
CJ3	3.000	1.500	NAILED	3.000	10.115	47		-180
CJ1	1.000	3.500	WALL	0.000	8.094	257		-180
CJ1	1.000	1.500	NAILED	1.000	8.094	12	-5	-180
CJ1	1.000	1.500	NAILED	1.000	8.781	50	-86	-180
HJ5	7.009	7.028	WALL	0.000	8.094	284		-180
HJ5	7.009	1.500	NAILED	7.009	8.094	182		-180
HJ5	7.009	1.500	NAILED	7.009	11.446	112		-180
EJ4	4.000	5.500	WALL	0.000	8.094	284		-180
EJ4	4.000	1.500	NAILED	4.000	8.094	53		-180
EJ4	4.000	1.500	NAILED	4.000	10.967	80		-180
HJ4	5.594	7.028	WALL	0.000	8.094	199		-180
HJ4	5.594	1.500	NAILED	5.594	8.094	68		-180
HJ4	5.594	1.500	NAILED	5.594	10.762	110		-180

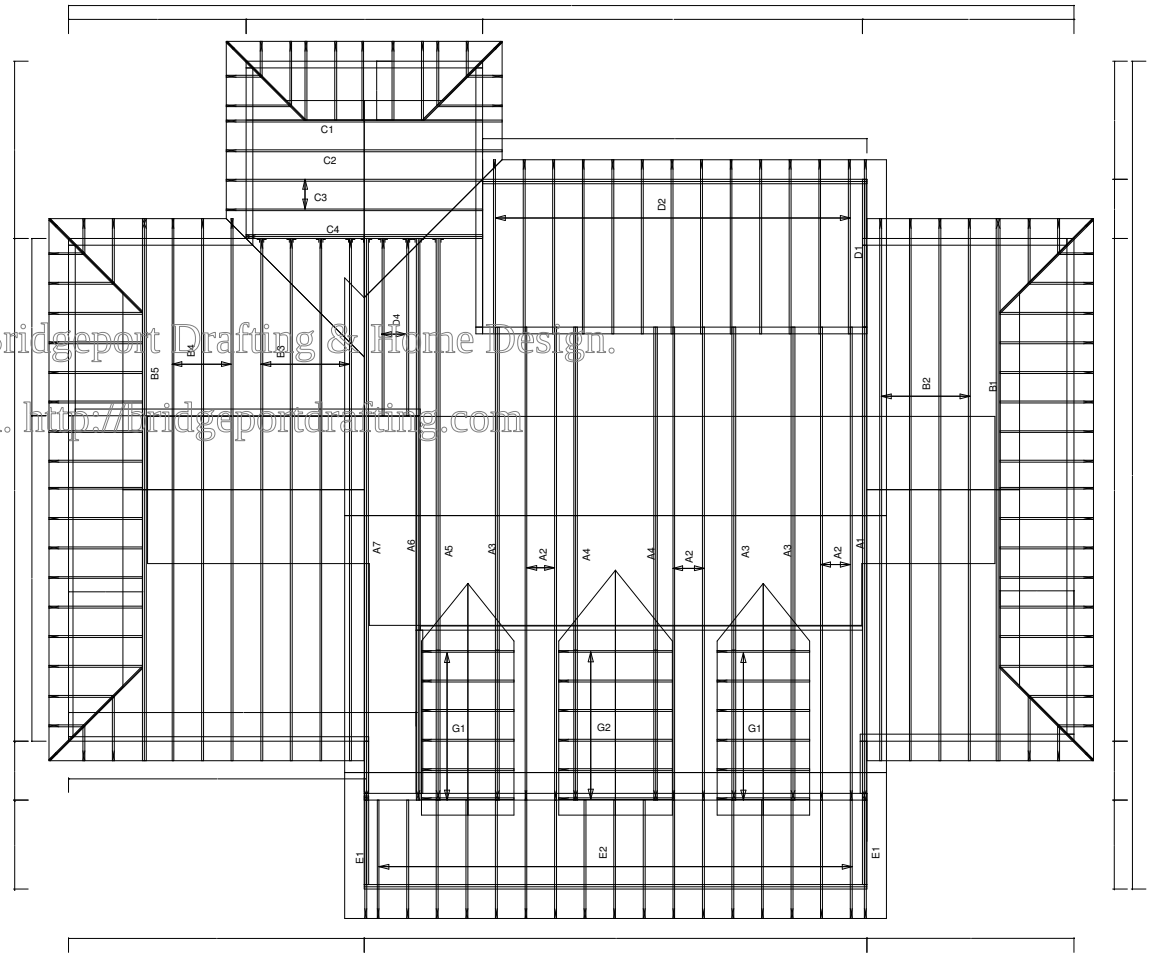

Copyright 2006, Bridgeport Drafting & Home Design.
All rights reserved. http://Bridgeportdrafting.com

REVISIONS: | BY

TRUSS LAYOUT

Bridgeport
Drafting & Home Design
Bobby H. Hinton
Designer
216 Bridgeport Road
Palatka, FL 32177
386.328.1593

JOB:
Palatka, Florida
Drawn by: Bobby Hinton

project #

date:

SHEET NO.